

Compfil™ IA

High Performance Industrial Air Filters

Compfil™ IA filters are high performance industrial air filters, designed to remove water and oil aerosols as well as particulates from compress air and gas streams.

Thanks to the unique combination of binder-free, non-woven nanofiber filter and pleating technology, these high performance filters can achieve a 70% reduction in energy costs, as well as improve filtration performance.

The nanofiber material is naturally oleophobic. Oil and water are actively rejected, so the differential pressure drop and therefore operational costs are reduced to a minimum compared with a conventional filter element.

Typical applications:

- Chemical and petrochemical industry
- Pharmaceutical industry
- Food and beverage
- Plastic industry
- Process filtration
- Instrument air



Features and Benefits

- **Binder free, thermally welded nanofiber media**
Low differential pressure and high particle load.
- **Oleophobe filter media**
Rejects oil and water.
- **Pleated media filter**
450% more filtration surface, higher particle load capacity and low air flow speed.
- **Support sleeves of stainless steel (316L)**
Extremely large free flow, secure and long operation.
- **70% less energy costs**
Due to the combination of binderfree, non-woven nanofibre filter media and pleating technology.



Specifications

Materials of Manufacture

Filter media:	Binder-free nanofibres.
Support sleeves inner/outer:	Stainless steel 1.4301/304.
Pre-and after filter medium:	Pleated Cerex.
Outer foam sock:	HT/CR sock up to 120°C (248°F) HT/NX sock up to 180°C (356°F).
Bonding:	Polyurethane.
End caps:	Stainless steel.
O-rings:	Perbunan®, Silicone free and free from parting compounds.

Maximum Differential Pressure

5bar at 20°C (72.5psi at 68°F), independent from operation pressure.

Type	Residual oil content at		Oil retention rate acc. to ISO 12500-1
	3 mg/m³	10 mg/m³	
IA-F	<0.1 ppm	0,2 ppm	99.6%
IA-M	<0.03 ppm	0,03 ppm	99.7%
IA-S	<0.01 ppm	0,02 ppm	99.8%

Operating Temperature

Maximum continuous: 85-90°C (185-194°F).


Start-up Differential Pressure

IA-F:	0.04bar (0.58psi).
IA-M:	0.08bar (1.16psi).
IA-S:	0.09bar (1.31psi).

Retention rate at a particle size of 0,01µm (ISO 8573-1)

IA-F:	99,999%.
IA-M:	99,99998%.
IA-S:	99,99999%.

Flow Rates

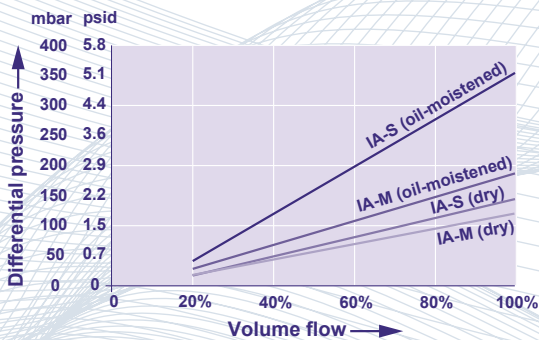

Element	Correction factor
02/05	0.04
03/05	0.08
03/10	0.12
04/10	0.17
04/20	0.19
05/20	0.25
05/25	0.32
07/25	0.47
07/30	0.68
10/30	1.0
15/30	1.55
20/30	2.10
30/30	3.28
30/50	5.89



Porvair Filtration Group Ltd.

Queensway
Stem Lane, New Milton,
Hampshire, BH25 5NN, UK
Tel: +44 (0)1425 612010
Email: info@porvairfiltration.com

Porvair Filtration Group Inc.

301 Business Lane
Ashland, Virginia 23005, USA
Tel: +1 804 550 1600
Email: infoUS@porvairfiltration.com

Porvair Filtration Group

Chengdong Area
Square Industrial Park, North District
Xiaonan Economic Development Zone
Xiaogan, 432000, China
Tel: +86 (0)712 2878955
Email: infoCN@porvairfiltration.com

www.porvairfiltration.com

Porvair Filtration India PVT. Ltd.

Gangotri Glacier Annex, Kavesar
Opposite Vijay Nagari, Off Ghodbunder Road
Thane (W), 400607, India
Tel: +91 22 25 976464 / +91 22 25 976465
Email: infoIN@porvairfiltration.com

Porvair is a registered trademark of Porvair plc.

Comfil is a trademark of Porvair plc.

Perbunan is a registered trademark of LANXESS Deutschland GmbH.

© Copyright 2018, Porvair Filtration Group Ltd. All rights reserved.

Whilst every effort has been made to ensure the accuracy of this document, due to continuous product development, the data contained is subject to constant revision and Porvair Filtration Group Ltd. reserves the right to change, alter or modify its contents.